



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

$3.81(XX-1)+14.20$

UL/CUL 技术参数

UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage	V	300	-
额定电流	Rated Current	A	8	-
接线范围	Wire Range	28-16		
单/多芯线	Solid/Stranded	[AWG]		
耐电压	Withstanding Voltage	1600V/1Min		

IEC 技术参数

IEC Technical Data




过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage	V	160	160
额定电流	Rated Current	A	7	7
额定冲击电压	Impulse withstand voltage	[kV]	2.5	2.5
导线截面积	Conductor cross section	0.5-1.5		
硬质/柔性导线	Solid/flexible	[mm ²]		

材料

绝缘材料	Insulation Material	PA66
阻燃等级	Inflammability	UL94V-0
导体材料	Contact Material	铜合金 Copper alloy
导体表面镀层	Contactive Coating	镀锡 Sn Plated

一般参数

间距	Pitch /极数	Poles	[mm] / [P]
剥线长度	Stripping Length	[mm]	
螺丝	Screw/扭矩	Torque(Max)	[N.m]
工作温度	Operating temperature	[°C]	
焊接温度	Soldering temperature	-	
引针尺寸	Pin Dimensions	[mm]	
PCB板孔径	PCB Hole Diameter	[mm]	

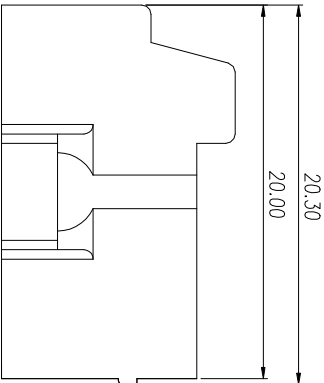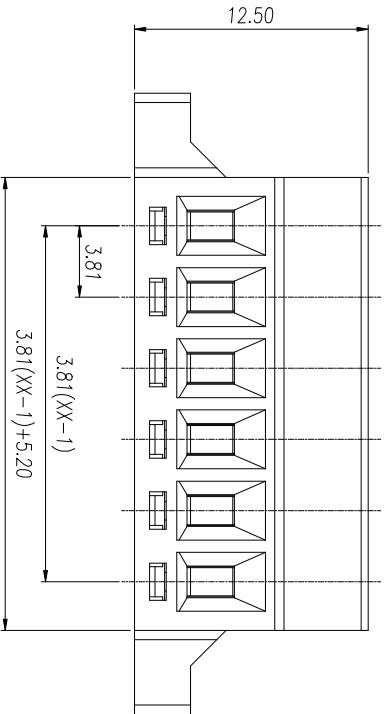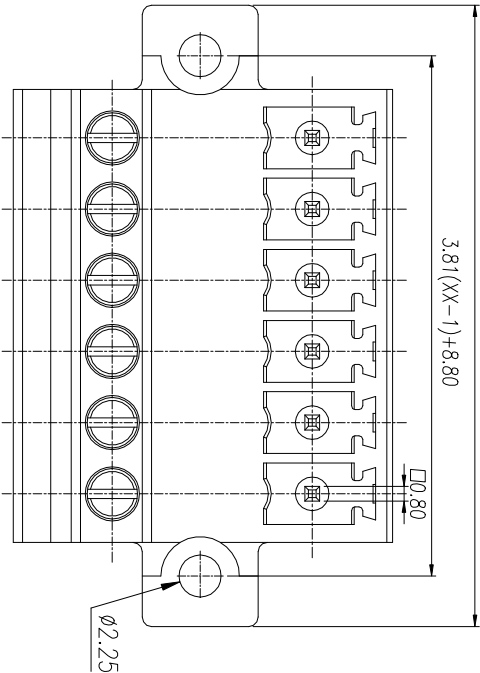

linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	to	over	over	over	over	over	over	over	over	over	over
6	6	10	10	30	60	100	100	160	10	10	100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	5:2
第三视图/THIRD ANGLE PROJECTION					
名称 / TITLE	WJ15EDGGB-3.81-XXP-1YY-00A				
版本 / REV	V0				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD