

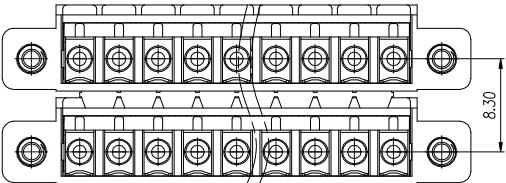
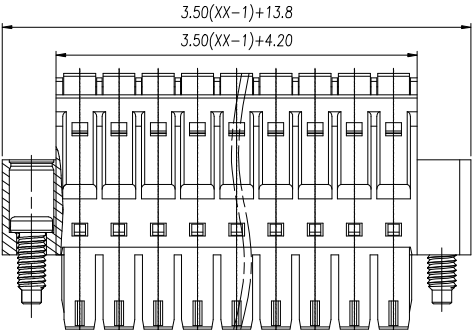



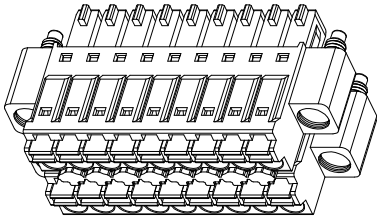

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

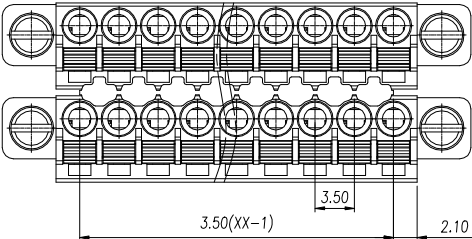

UL/CUL 技术参数		UL/CUL Technical Data					
等 级	Use Group	B	C	D			
额定电压	Rated Voltage [V]	300	-	300			
额定电流	Rated Current [A]	8	-	8			
接线范围	Wire Range	24-16			1600V/1Min		
单/多芯线	Solid/Stranded [AWG]						
耐电压	Withstanding Voltage						
IEC 技术参数					IEC61984		
IEC Technical Data							
过电压类别	Overvoltage Category	III	III	II			
污染等级	Contamination Class	3	2	2			
额定电压	Rated Voltage [V]	160	160	320			
额定电流	Rated Current [A]	8	8	8			
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5			
导线截面积	Conductor cross section	0.2-1.5					
硬质/柔性导线	Solid/ flexible [mm²]						
材 料 Material							
绝缘材料	Insulation Material	PA66			UL94V-0		
阻燃等级	Imflammability						
导体材料	Contact Material	铜合金 Copper alloy					
导体表面镀层	Contactive Coating	镀锡 Sn Plated					
一般参数 Other Data							
间距 Pitch /极数 Poles	[mm] / [P]	3.5 / 2*02~2*24					
剥线长度 Stripping Length	[mm]	9~10					
螺丝 Screw/扭矩 Torque(Max)	[N.m]	-					
工作温度 Operating temperature	[°C]	-40~105					
焊锡温度 Soldering temperature		-					
引针尺寸 Pin Dimensions	[mm]	-					
PCB板孔径 PCB Hole Diameter	[mm]	-					

linear dimension(Tolerances Standard GB/T 14486-2008)							— □ ⊥		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to 600
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	WJ15EDGKNM-B-3.5-2*XXP-1YY-00A	