

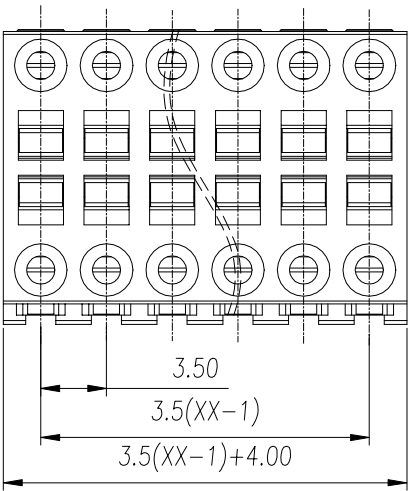


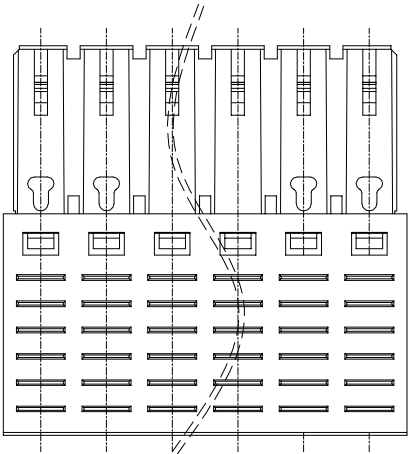

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

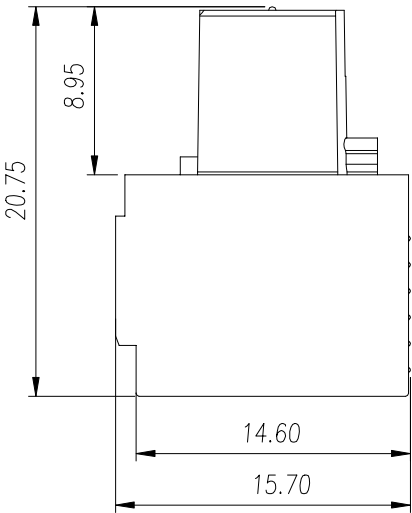

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

UL/CUL 技术参数 UL/CUL Technical Data					UL1059				
等级	Use Group		B	C	D				
额定电压	Rated Voltage	[V]	150	50	-				
额定电流	Rated Current	[A]	7	7	-				
接线范围	Wire Range		28-18						
单/多芯线	Solid/Stranded	[AWG]							
耐电压	Withstanding Voltage		1300V/1Min						
IEC 技术参数 IEC Technical Data					IEC61984				
过电压类别	Overvoltage Category		III	III	II				
污染等级	Contamination Class		3	2	2				
额定电压	Rated Voltage	[V]	80	160	200				
额定电流	Rated Current	[A]	10	10	10				
额定冲击电压	Impulse withstand voltage	[KV]	2.5	2.5	2.5				
导线截面积	Conductor cross section		0.2-1.0						
硬质/柔性导线	Solid/flexible	[mm ²]							
材料					Material				
绝缘材料	Insulation Material		PA66						
阻燃等级	Imflammability		UL94V-0						
导体材料	Contact Material		铜合金 Copper alloy						
导体表面镀层	Contactive Coating		镀锡 Sn Plated						
一般参数					Other Data				
间距	Pitch /极数 Poles	[mm] / [P]	3.5 / 2*02-2*24						
剥线长度	Stripping Length	[mm]	7~8						
螺丝	Screw/扭矩 Torque(Max)	[N.m]	-						
工作温度	Operating temperature	[°C]	-40~105						
焊接温度	Soldering temperature		-						
引针尺寸	Pin Dimensions	[mm]	-						
PCB板孔径	PCB Hole Diameter	[mm]	-						

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	WJ15EDGKSH-3.5-2*XXP-1YY-00A	