






慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

UL/CUL 技术参数		UL/CUL Technical Data					
等 级	Use Group	B	C	D			
额定电压	Rated Voltage [V]	150	-	-			
额定电流	Rated Current [A]	5	-	-			
接线范围	Wire Range	-					
单/多芯线	Solid/Stranded [AWG]						
耐电压	Withstanding Voltage	1300V/1Min					
IEC 技术参数		IEC61984					
IEC Technical Data							
过电压类别	Overvoltage Category	III	III	II			
污染等级	Contamination Class	3	2	2			
额定电压	Rated Voltage [V]	80	160	320			
额定电流	Rated Current [A]	5	5	5			
额定冲击电压	Impulse withstand voltage [KV]	1.5	2.5	2.5			
导线截面积	Conductor cross section	-					
硬质/柔性导线	Solid/ flexible [mm²]						
材 料		Material					
绝缘材料	Insulation Material	PA66					
阻燃等级	Infammability	UL94V-0					
导体材料	Contact Material	铜合金 Copper alloy					
导体表面镀层	Contactive Coating	镀锡 Sn Plated					
一般参数		Other Data					
间距 Pitch /极数 Poles	[mm] / [P]	2.5 / 02-24					
剥线长度	Stripping Length [mm]	-					
螺丝 Screw/扭矩 Torque(Max)	[N.m]	-					
工作温度	Operating temperature [°C]	-40~105					
焊锡温度	Soldering temperature	260°C/5S					
引针尺寸	Pin Dimensions [mm]	0.8*0.8					
PCB板孔径	PCB Hole Diameter [mm]	Ø1.4					

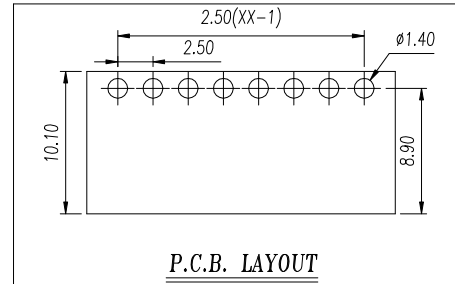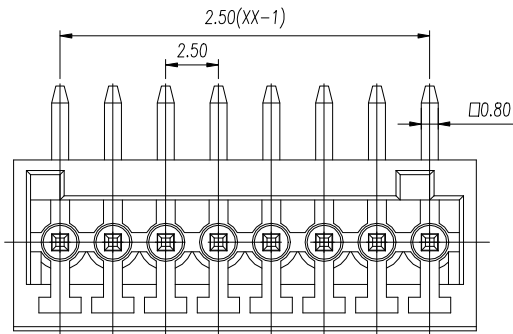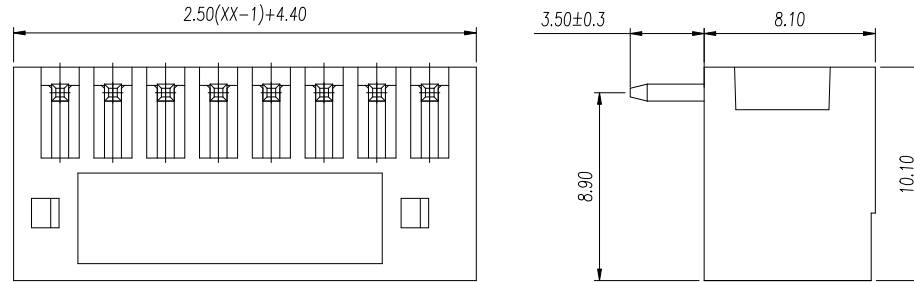

02P视图

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

单位/UNITS	mm	尺寸/ SIZE	A4	比例/ SCALE	3:1	第三视角/THIRD ANGLE PROJECTION	版本/ REV	V0
						名称/ TITLE	WJ15EDGRC-2.5-XXP-1YY-00A	