




慈溪市万捷电子有限公司




CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

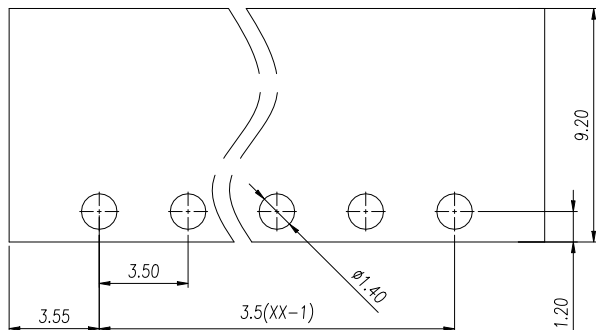

P.C.B. LAYOUT

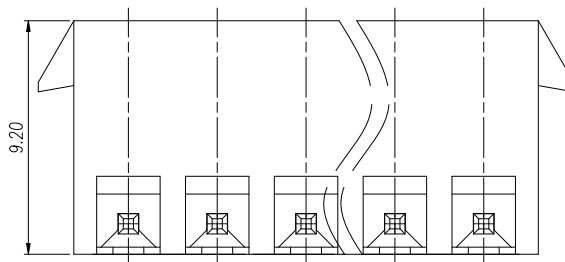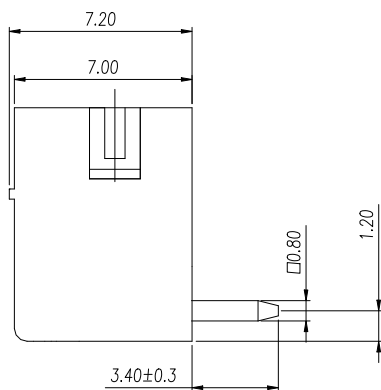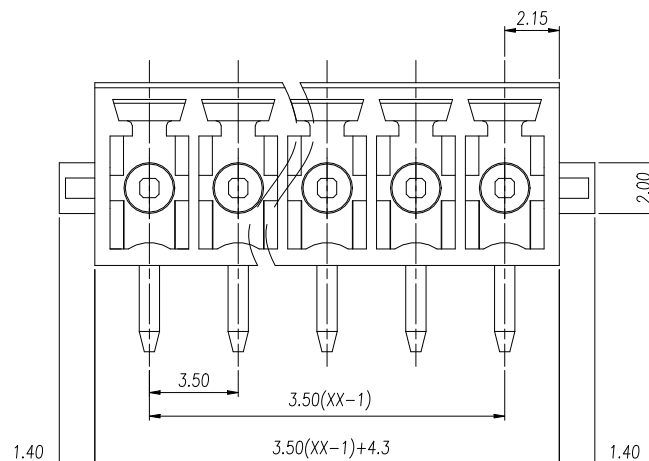

UL/CUL 技术参数 UL1059

UL/CUL	Technical Data	B	C	D
等级	Use Group			
额定电压	Rated Voltage [V]	300	-	300
额定电流	Rated Current [A]	8	-	8
接线范围	Wire Range			
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage			1600V/1Min

IEC 技术参数 IEC 61984

IEC	Technical Data	III	III	II
过电压类别	Overvoltage Category			
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	160	160	250
额定电流	Rated Current [A]	7	7	7
额定冲击电压	Impulse withstand voltage [KV]	2.5	2.5	2.5

导线截面积 Conductor cross section
硬质/柔性导线 Solid/flexible [mm²]

材料	Material
绝缘材料	Insulation Material
阻燃等级	Imflammability
导体材料	Contact Material
导体镀层	Contactive Coating

一般参数	Other Data
间距	Pitch [mm]
极数	Poles [P]
剥线长度	Stripping Length [mm]
螺丝	Screw
扭矩	Torque(Max) [N.m]
工作温度	Operating temperature [°C]

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 0.60
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
名称 / TITLE						WJ15EDGRG-3.5-XXP-1YY-00A		