







慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

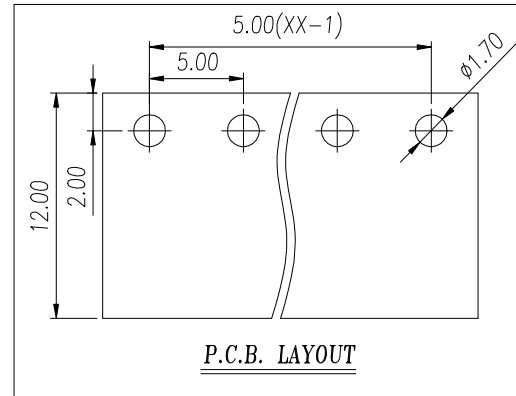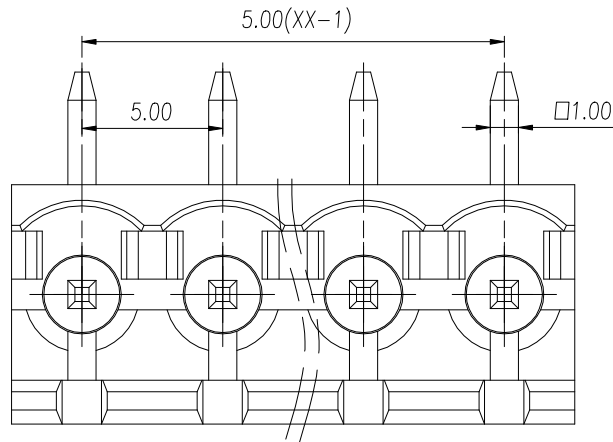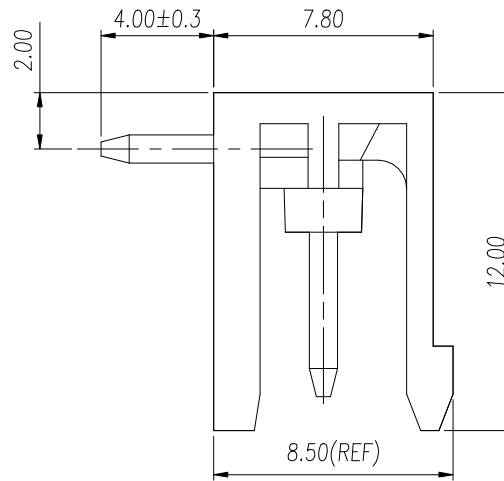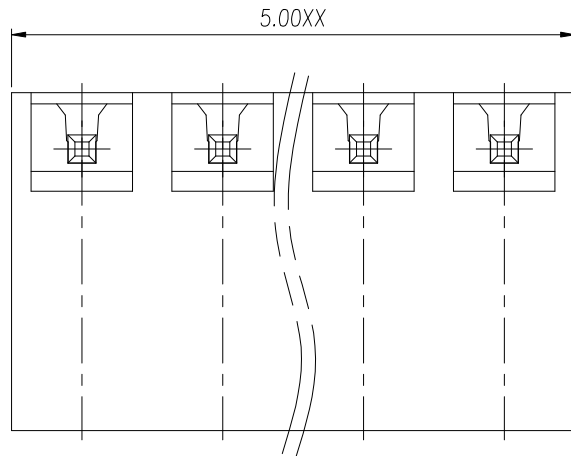

UL/CUL 技术参数		UL/CUL Technical Data				
等级	Use Group		B	C	D	
额定电压	Rated Voltage	[V]	300	-	300	
额定电流	Rated Current	[A]	15	-	10	
接线范围	Wire Range		-			
单/多芯线	Solid/Stranded	[AWG]				
耐电压	Withstanding Voltage		1600V/1Min			
IEC 技术参数						
IEC Technical Data						
过电压类别	Overvoltage Category		III	III	II	
污染等级	Contamination Class		3	2	2	
额定电压	Rated Voltage	[V]	250	320	400	
额定电流	Rated Current	[A]	10	10	10	
额定冲击电压	Impulse withstand voltage	[KV]	4.0	4.0	4.0	
导线截面积	Conductor cross section		-			
硬质/柔性导线	Solid/ flexible	[mm²]				
材 料		Material				
绝缘材料	Insulation Material		PA66			
阻燃等级	Imflamability		UL94V-0			
导体材料	Contact Material		铜合金 Copper alloy			
导体表面镀层	Contactive Coating		镀锡 Sn Plated			
一般参数		Other Data				
间距	Pitch /极数	Poles [mm] / [P]	5.0 / 02-24			
剥线长度	Stripping Length	[mm]	-			
螺丝	Screw/扭矩	Torque(Max) [N.m]	-			
工作温度	Operating temperature	[°C]	-40~105			
焊锡温度	Soldering temperature		260°C/5S			
引脚尺寸	Pin Dimensions	[mm]	1.0*1.0			
PCB板孔径	PCB Hole Diameter	[mm]	Ø1.7			

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 500	over 500 to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	±2.00	±2.50

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	4:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD						名称 / TITLE	WJ2EDGR-5.0-XXP-1YY-00A	