




慈溪市万捷电子有限公司



CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

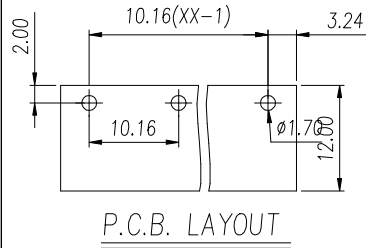

P.C.B. LAYOUT

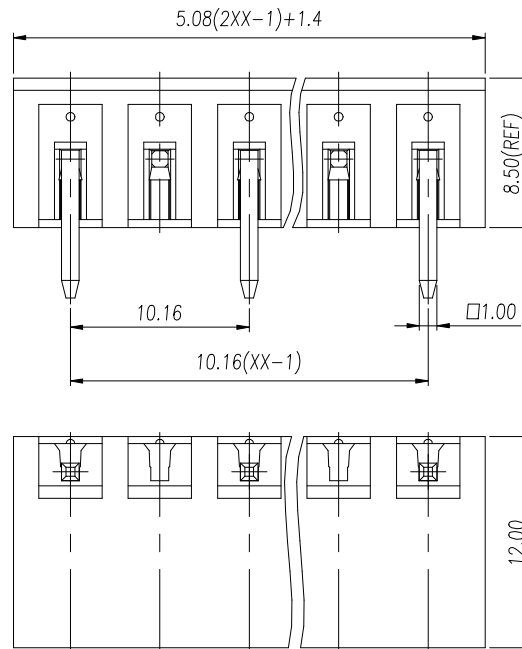

UL/CUL 技术参数

UL/CUL Technical Data



等级	Use Group	B	C	D
额定电压	Rated Voltage [V]	600	/	600
额定电流	Rated Current [A]	15	/	5
接线范围	Wire Range	/		
单/多芯线	Solid/Stranded [AWG]			
耐电压	Withstanding Voltage	2200V/1Min		

IEC 技术参数

IEC Technical Data



过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage [V]	630	1000	1000
额定电流	Rated Current [A]	10	10	10
额定冲击电压	Impulse withstand voltage [KV]	6	6	6
导线截面积	Conductor cross section	/		
硬质/柔性导线	Solid/flexible [mm ²]			

材料 Material

绝缘材料	Insulation Material	PA66
阻燃等级	Flame retardant rating	UL94V-0
导体材料	Contact Material	铜合金 Copper alloy
导体表面镀层	Plating of conductor surface	镀锡 Sn Plated

一般参数 Other Data

间距 Pitch / 极数 Poles	[mm] / [P]	10.16/02~12
剥线长度 Stripping Length	[mm]	/
螺丝 Screw/ 扭矩 Torque(Max)	[N.m]	/
工作温度 Operating temperature	[°C]	-40~105
焊锡温度 Soldering temperature		260°C/5S
引针尺寸 Pin Dimensions	[mm]	1.0*1.0
PCB板孔径 PCB Hole Diameter	[mm]	Ø1.7

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 500	over 500 to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	5:2	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	WJ2EDGRC-10.16-XXP-2YY-00A	



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD