




慈溪市万捷电子有限公司





CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

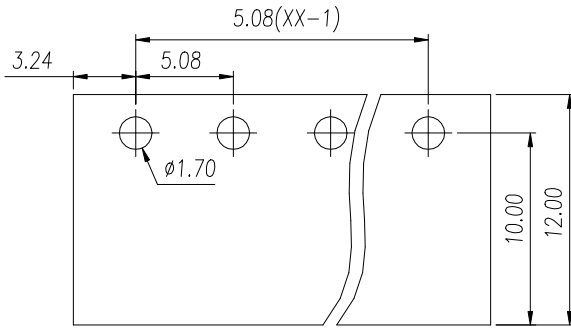

P.C.B. LAYOUT

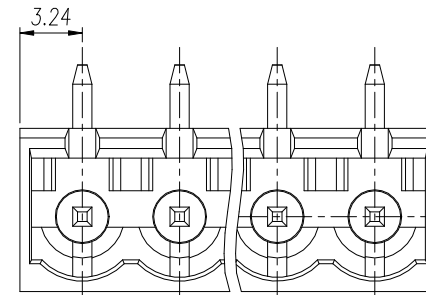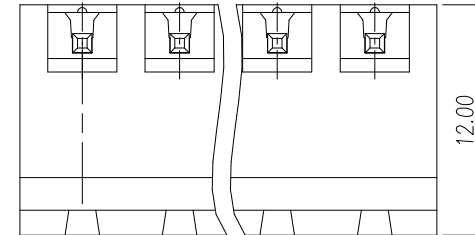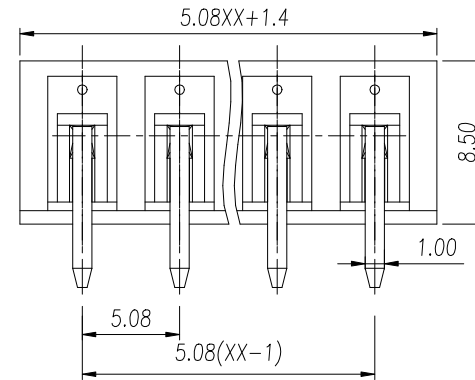

UL/CUL 技术参数					UL/CUL Technical Data			
等 级	Use Group		B	C	D			
额定电压	Rated Voltage	[V]	300	-	300			
额定电流	Rated Current	[A]	15	-	10			
接线范围	Wire Range							
单/多芯线	Solid/Stranded	[AWG]				-		
耐电压	Withstanding Voltage					1600V/1Min		
IEC 技术参数						IEC61984		
IEC Technical Data								
过电压类别	Overvoltage Category		III	III	II			
污染等级	Contamination Class		3	2	2			
额定电压	Rated Voltage	[V]	250	320	400			
额定电流	Rated Current	[A]	10	10	10			
额定冲击电压	Impulse withstand voltage	[KV]	4.0	4.0	4.0			
导线截面积	Conductor cross section							
硬质/柔性导线	Solid/ flexible	[mm²]				-		
材 料						Material		
绝缘材料	Insulation Material					PA66		
阻燃等级	Imflammability					UL94V-0		
导体材料	Contact Material					铜合金 Copper alloy		
导体表面镀层	Contactive Coating					镀锡 Sn Plated		
一般参数						Other Data		
间距	Pitch / 极数	Poles	[mm] / [P]	5.08 / 02~24				
剥线长度	Stripping Length		[mm]	-				
螺丝	Screw/ 扭矩	Torque(Max)	[N.m]	-				
工作温度	Operating temperature		[°C]	-40~105				
焊锡温度	Soldering temperature			260°C/5S				
引针尺寸	Pin Dimensions		[mm]	1.0*1.0				
PCB板孔径	PCB Hole Diameter		[mm]	Ø1.7				

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	3:1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	WJ2EDGRRRC-5.08-XXP-1YY-00A	