





慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD


REVISION RECORD

REV.	DESCRIPTION	ECN No.	APPROVED	DATE

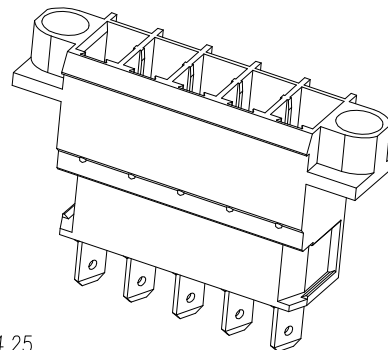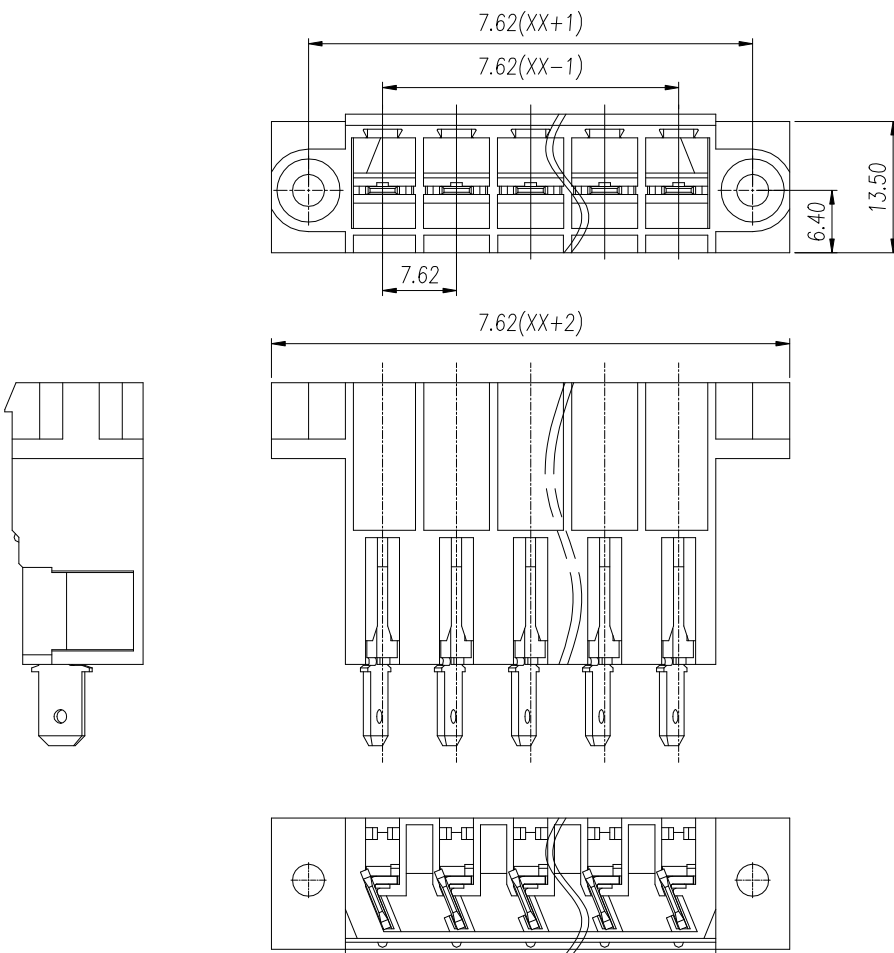

UL/CUL 技术参数 UL/CUL Technical Data					UL [®] US	
等级	Use Group	B	C	D		
额定电压	Rated Voltage [V]	300	300	300		
额定电流	Rated Current [A]	30	30	10		
接线范围	Wire Range					
单/多芯线	Solid/Stranded [AWG]					-
耐电压	Withstanding Voltage					1600V/1Min
IEC 技术参数 IEC Technical Data					IEC61984	
过电压类别	Overvoltage Category	III	III	II		
污染等级	Contamination Class	3	2	2		
额定电压	Rated Voltage [V]	400	400	800		
额定电流	Rated Current [A]	15	15	15		
额定冲击电压	Impulse withstand voltage [KV]	6.0	6.0	6.0		
导线截面积	Conductor cross section					-
硬质/柔性导线	Solid/flexible [mm ²]					-
材料					Material	
绝缘材料	Insulation Material					PA66
阻燃等级	Imflammability					UL94V-0
导体材料	Contact Material					铜合金 Copper alloy
导体表面镀层	Contactive Coating					镀锡 Sn Plated
一般参数					Other Data	
间距	Pitch /极数 Poles [mm] / [P]					7.62 / 02~24
剥线长度	Stripping Length [mm]					-
螺丝	Screw/扭矩 Torque(Max) [N.m]					-
工作温度	Operating temperature [°C]					-40~105
焊锡温度	Soldering temperature					260°C/5S
引针尺寸	Pin Dimensions [mm]					-
PCB板孔径	PCB Hole Diameter [mm]					-

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	over 250 to 500	over 500 to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:3.1	第三视角 / THIRD ANGLE PROJECTION	版本 / REV	V0
						名称 / TITLE	WJ3CDGM-7.62-XXP-1YY-00A	