

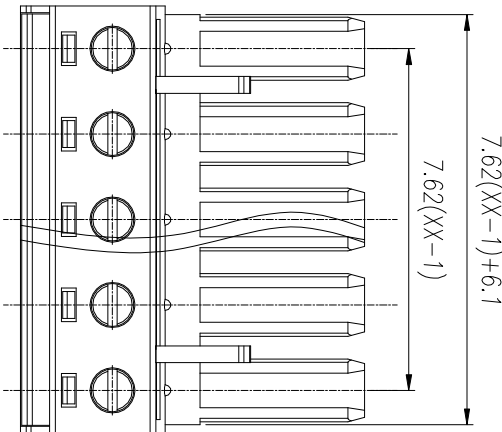


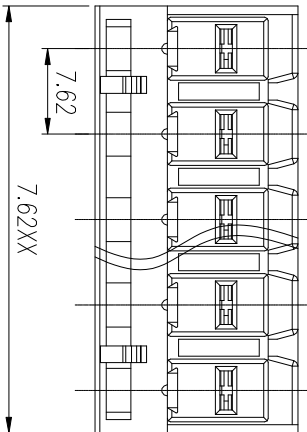

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED DATE

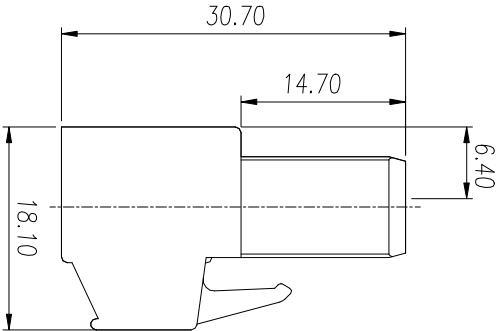

UL/CUL 技术参数		UL/CUL Technical Data			cPA [®] us		
等级	Use Group	B	C	D			
额定电压	Rated Voltage	V	300	-	300		
额定电流	Rated Current	A	30	-	10		
接线范围	Wire Range	28-10					
单/多芯线	Solid/Stranded	[AWG]	1800V/1Min				
耐电压	Withstanding Voltage						
IEC 技术参数		IEC61984					
IEC Technical Data							
过电压类别	Overvoltage Category	III	III	II			
污染等级	Contamination Class	3	2	2			
额定电压	Rated Voltage	V	400	630	1000		
额定电流	Rated Current	A	20	20	20		
额定冲击电压	Impulse withstand voltage	[kV]	6.0	6.0	6.0		
导线截面积	Conductor cross section	0.5-4.0					
硬质/柔性导线	Solid/flexible	[mm ²]					
材料		Material					
绝缘材料	Insulation Material	PA66					
阻燃等级	Inflammability	UL94V-0					
导体材料	Conductor Material	铜合金 Copper alloy					
导体表面镀层	Conductive Coating	镀锡 Sn Plated					
一般参数		Other Data					
间距 Pitch /极数	Poles	[mm]/[P]	7.62 /02-24				
剥线长度	Stripping Length	[mm]	8-9				
螺丝 Screw/扭矩	Torque(Max)	[N.m]	M30.5				
工作温度	Operating temperature	[°C]	40~105				
焊接温度	Soldering temperature		-				
引针尺寸	Pin Dimensions	[mm]	-				
PCB板孔径	PCB Hole Diameter	[mm]	-				

linear dimension(Tolerances Standard GB/T 14486-2008)											
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	over 100 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	1:5.1
第三视图/THIRD ANGLE PROJECTION					
名称 / TITLE	版本 / REV V0				
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD	WI3EDGK-7.62-XXP-1YY-00A				